

# **DALI 25W RGB+CCT LED Downlight**

Model No.: DL-DOW25

### **Features**



16 Millions of colors to choose



Dimmable Saturation control



Color temperature 2700~6500K



Compliant with DALI standard protocol IEC62386

### **Parameters**

Model No.: DL-DOW25
Input Signal: DALI Signal


DALI Bus Standard: IEC62386 Input Voltage: AC100~240V 50/60Hz

Working Temperature: -20~60°C

Power: 25W CRI: >80 PF: >0.5 Color Temperature: 2700K~6500K


Luminous Flux: 2000LM Light Efficiency: 80LM/W Dimming range: 0~100%

Beam Angle: 120° Lifespan: 50000 hours Product Weight: 860g Material: Aluminum



Hole Size: ø200-210mm

# **Connection Diagram**

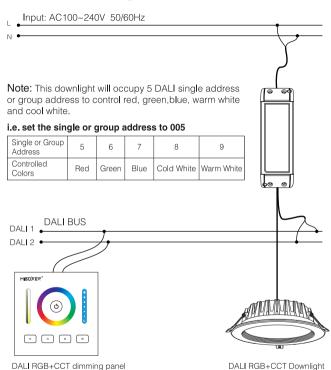



(Purchased separately)
For more details, pls read the dimming panels instruction.


### Installation

- Please open the hole on the ceiling according to the correct size of Diagram 1.
- 2). Connect the driver properly according to the wire connection Diagram
  - 2. ( Please ensure the power is not connected when you install the downlight ).
- 3), put the driver and wire into the ceiling from the hole.
- Push in the two spring elements, make sure that they are deployed and anchored on the back of the ceiling.









## Caution

- To reduce the risk of electric shock, please ensure the power is not connected when you install the downlight.
- Notice! Amateurs do not disassemble or install the lamps. If the light is damaged, please seek professional electrical assistance, or please discard the light.
- Lamp installation must be correct and strict, solid and reliable, avoid long time using in violent vibration place.

