

1. Features

This item supports zigbee 3.0 standard protocol with low consumption, strong ability to pair with network automatically and resist interference.



16 Millions of colors to choose



Color temperature 2700K~6500K



Dim brightness/saturation



Product follow Zigbee 3.0 standard protocol



Zigbee 3.0 remote control
Control distance 100m (open area)




Smartphone App control
(Zigbee 3.0 gateway is needed)



Support third party voice control
(Zigbee 3.0 gateway is needed)

GU10 RGB+CCT LED Spotlight (Zigbee 3.0)

Model No.: FUT103Z

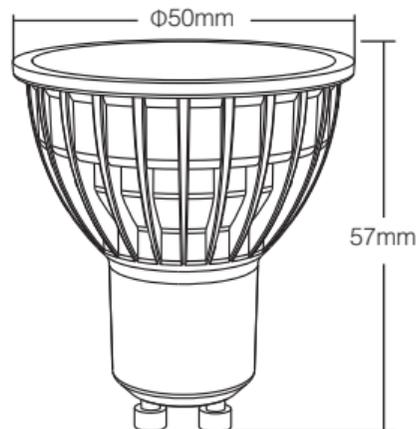

GU10 RGB+CCT LED Spotlight (Zigbee 3.0)

Model No.: FUT103Z

Power: 4W

Working Temp.: -10~40°C

Voltage: 100-240V~ 50/60Hz

Color Temp.: 2700K~6500K

Light Efficiency: 70LM/W

Luminous Flux: 280LM

CRI: >80 PF: 0.55

Lifespan: 50000h


Beam Angle: 25°

Control Distance: 100m (open area)

Size: 50*57mm

2. Instructions

Put the light in the suitable lighting fixture.

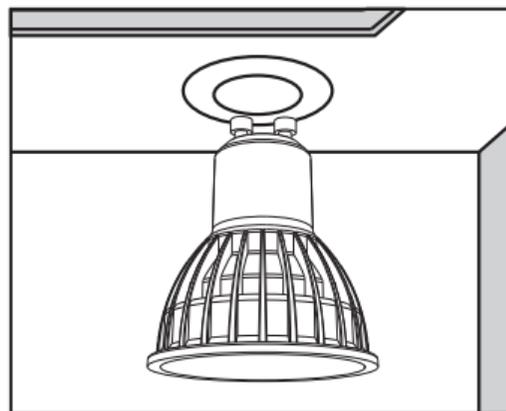

Attention:

For lights with a weight significantly higher than that of the lights for which they are a replacement, attention should be drawn to the fact that the increased weight may reduce the mechanical stability of certain luminaires and lampholders and may impair contact making and light retention.

3. How to control the light via phone App?

Please add zigbee 3.0 gateway to [MiBoxer Smart] App firstly

1. Connect with power supply.
2. Turn on/off light continuously over 3 times , confirm the light with red color in breathe ambience.
3. Open [**MiBoxer Smart**] App and add sub-device (see following screenshot).
4. You can dim light, group control and ambience control after adding device completely.



4. Match and Dismatch with zigbee 3.0 remote

stay closer distance between the light and remote

Remote	Light
The remote doesn't pair with zigbee gateway	Support match and dismatch light
The remote paired with zigbee gateway	Only support match and dismatch light which connected with same gateway

4.1 Instruction of Matching

- (1) Connect with power supply.
- (2) Ensure the light is always on (please wait 5 seconds and turn off, turn on again 1 time if the light is in red color with breathe ambience).
- (3) Long press group control " | " button with 3 seconds untill the indicator of remote flash quickly (check details in remote instruction).
- (4) Please keep closer for remote and the light which you want to connect (within 1 meter).
- (5) Matching is done if the light breathe 3 times.

4.2 Instruction of Dismatching

- (1) Connect with power supply.
- (2) Ensure the light is always on.
- (3) Long press group control " O " button with 3 seconds untill the indicator of remote flash slowly (check details in remote instruction).
- (4) Please keep closer for remote and the light which you want to connect (within 1 meter).
- (5) Dismatching is done if the light breathe 3 times.


Please repeat above steps if you are failed

Attention:

1. Remote only match or dismatch with one light in one time, it will match or dismatch with the nearest light.
2. **Remote doesn't pair with gateway:**
One light is only controlled by one remote.
3. **Light doesn't pair with gateway:**
It can not be controlled by remote which already paired with gateway.
4. **If remote and light both connected with gateway:**
One light can be controlled by many remotes.

Warning

1. Ensure voltage is 100-240V~.
2. Please turn off power supply while install the light.
3. Stay away from high temperature and humid area.



Light can not use in humid area



Made in China