

**MiBOXER<sup>®</sup>**

**Mi • Light Subordinate New Brand**

**20W RGB+CCT Panel Light**

Model No.: FUTL03

# Features

20W RGB+CCT Panel Light is made of Aluminum Alloy+LGP+diffuser plate. It's with full-sealed design with anti-moisture and anti-mosquito. Beam angle is 160degree; The light is smooth without flickering,flare and dark space. Widely used on hotel,restaurant,exhibition center and office,etc.



16 Millions  
of colors to choose



Dimmable  
Saturation control



Color temperature  
2700K~6500K



Beam Angle 160°



2.4G RF Remote control  
Control distance 30m



Smart phone App control  
WiFi Box or 2.4GHz Gateway is needed



Support amazon alexa and google assistant control  
2.4GHz Gateway is needed

# Parameters

Model No.: FUTL03

Input: AC100~240V 50/60Hz

Power Rating: 20W

Working Temperature: -20~60°C

Color temperature: 2700~6500K

Luminous Flux: 1400LM

Light Efficiency: 70LM/W

CRI: >80


UGR: <19

Lifespan: 50000h

Beam Angle: 160°

Remote Control Distance: 30m

Product Weight: 840g




# Dynamic Mode Sheet

Number	Dynamic Mode	Brightness	Speed	Saturation
1	Colors gradual change	Adjustable	Adjustable	Adjustable
2	White light gradual change			Unadjustable
3	RGB gradual change			Adjustable
4	Seven colors jump to change			
5	Jump to change randomly			
6	Red light gradual change +Flash 3 times			
7	Green light gradual change +Flash 3 times			
8	Blue light gradual change +Flash 3 times			
9	White light gradual change +Flash 3 times			Unadjustable


## Auto-transmitting Diagram

One strip light driver can transmit the signals from the remote control to another strip light driver within 30m, as long as there is a strip light driver within 30m, the remote control distance can be limitless.

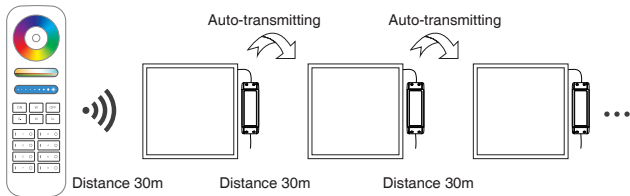

# Auto-synchronization function

Different strip light drivers can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed, and within 30m distance.

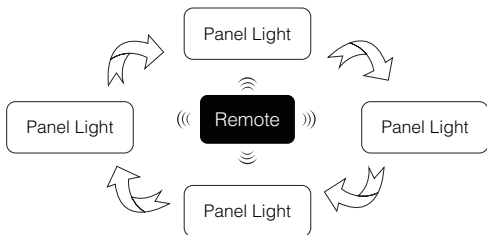


## Connection Diagram

Input: AC100~240V

( L )  
Brown

( N )  
Blue

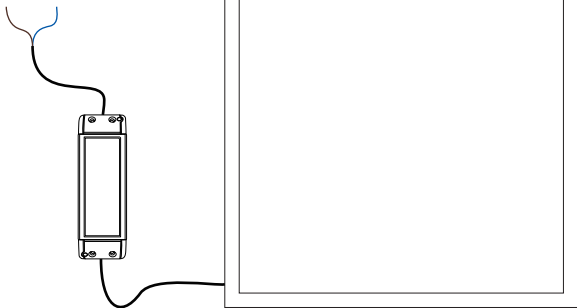

# Link/Unlink

Compatible with these remote controls (Purchased separately)



FUT089



FUT092



FUT088




FUT095




FUT096




B8



B4 / T4



B3 / T3



B0



## NOTE:

Lighting can be working after linking with remote; for more details, pls read the remote instruction.

# Attention

1. Please read the instructions carefully, and make sure the environment is suitable for the installation.
2. The products is only for indoor using.
3. Please don't install the panel light on the areas with hot steam and corrosive gas.
4. Non-specialized person do not dismantle the panel light, otherwise it will damage the panel light.
5. Please do not use panel light around the mental area and high magnetic field, otherwise, it will badly affect the control distance.

## Maintenance Considerations

1. Please switch off the power before cleaning the panel light.
2. Please clean the panel light with dry duster cloth; do not use chemical and corrosive materials to clean the panel light.